

⋮ R90

FLUKO®


Pneumatic Lifting Mixer

Description

Mobile pneumatic mixing equipment, this equipment has the characteristics of long shaft design, movable lifting stand, etc., and can adapt to a variety of scenes and various containers, with the maximum handling capacity up to 700L.

Applicable

Suitable for flammable and explosive environment, IBC container with small feeding opening, etc. A variety of stirring agitators can be selected for different mixing requirements.

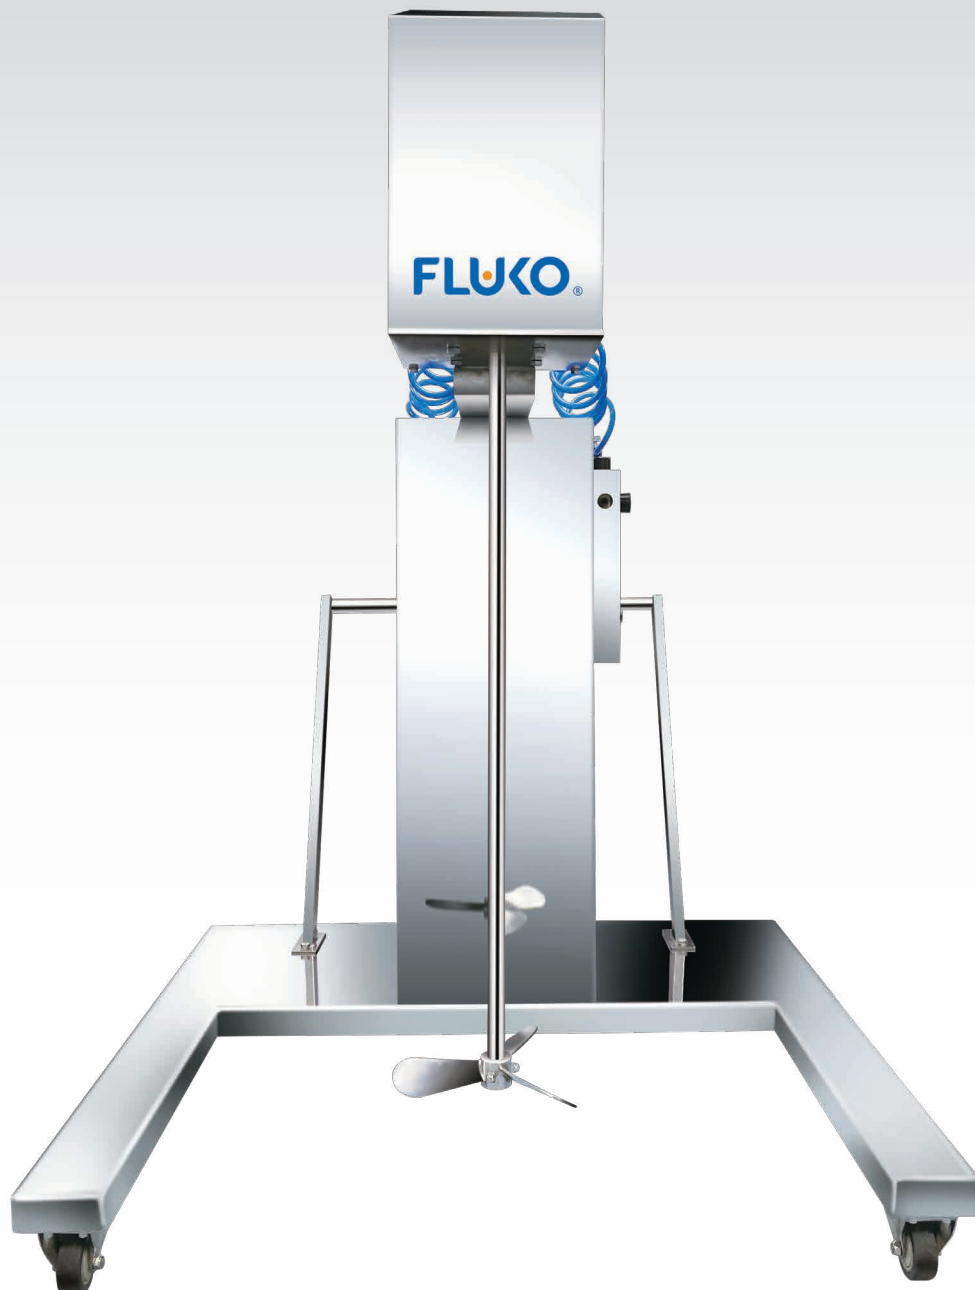



Order #	6122901
Model	R90
Power	1.5HP (Piston type pneumatic motor)
Explosion proof grade	Exd II BT4
Mixing capacity	Max 700L
Max viscosity	10,000cP@ < 1100kg/m ³
Speed range	0~720rpm
Max torque	28N.m
Product contact part material	SS316L , Ra≤0.8μm
Product not contact part material	SS304 , Ra≤1.6μm
Lifting way	Pneumatic lifting
Lifting distance	900mm
Max container height	≤1100mm
Max container OD	≤980mm
Drive way	Compressed air, air source
Rated working air pressure	6bar
Max air pressure	8bar
Air consumption	985L/min
Compressed air inlet	OD Ø 12mm Quick plug hose
Standard stirring agitator	EPR-300 Propeller agitator
Agitator fixed way	Rigid coupling
Seal type	Lip seal
Working frame, base	Mobile stand
Dimensions	1300x1220x1700
Weight	~120kg
Packing	Wooden case

Biology
Pharmacy

Food

Daily Care

Chemical
Industry

New
Material



FLUKO EQUIPMENT SHANGHAI CO., LTD.
#21-22 NO. 300, Shunda Road, Jiading, 201802, Shanghai, China
Phone +86 21 230 993 68, Fax +86 21 510 103 68
sales@fluko.com , www.fluko.com